

MiMo Directional 3.6/5.0GHz Antenna

WMM[X]9G-36-55-NJ

PANORAMA ANTENNAS



WMM[X]9G-36-55-NJ

Supports 2x2, 3x3 or 4x4 MiMo across 3.4-3.8/5.0GHz

Up to 4x wideband elements with gain

Suitable for mast and rail mounting


The WMM[X]9G-36-55 is a high directional gain 2x2, 3x3 or 4x4 MiMo antenna for 5G / CBRS / private LTE networks. Incorporating two, three or four separately fed gain element assemblies in a single housing the WMM[X]9G-36-55 is equipped to provide client side MiMo support for 3.6 and 5.0GHz networks.

The weather resistant housing is designed for rail or mast mounting. Supplied with fitted N female bulkhead connections for easy installation the product can be fitted with a range of extension cables. The product range is certified to both IP66 and IK10 ideal for external or internal use in tough environments.

The WMM[X]9G-36-55 is a cost effective value added product for providing MiMo 3.6/5.0GHz coverage to a room, platform or other area.

Technical Drawing

WMM49G-36-55-NJ Shown

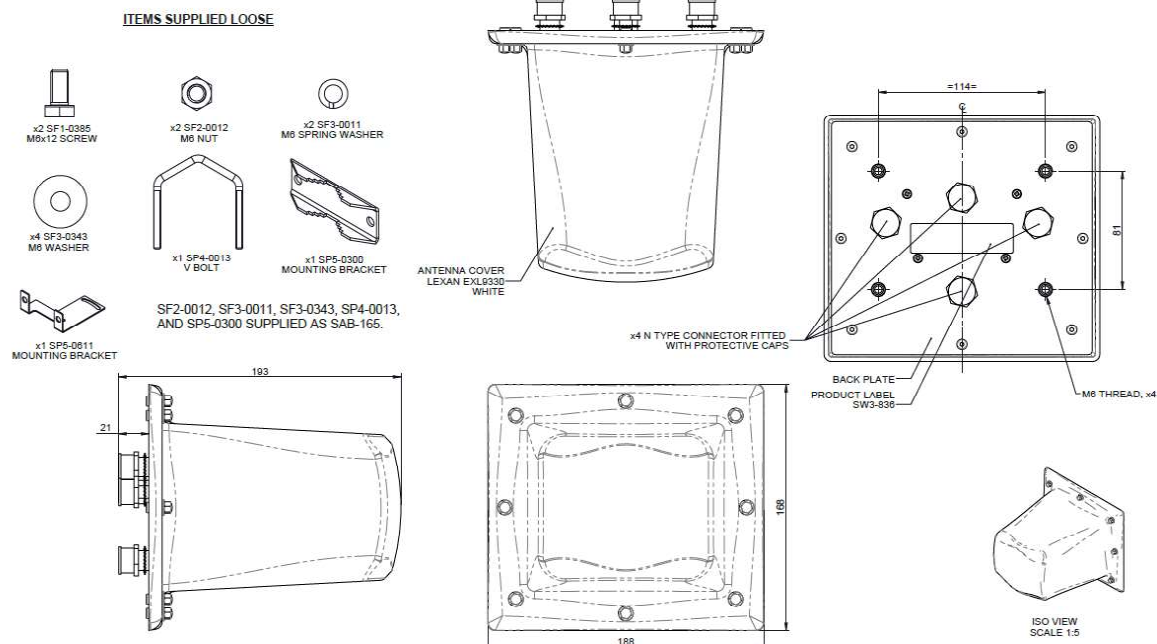

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

PANORAMA ANTENNAS

WMM[X]9G-36-55-NJ 27/07/2020 - V2

Page 1

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

MiMo Directional 3.6/5.0GHz Antenna

WMM[X]9G-36-55-NJ

PANORAMA ANTENNAS

Product Data

Part No.

WMM49G-36-55-NJ

WMM39G-36-55-NJ

WMM29G-36-55-NJ

Electrical Data

Frequency range (GHz)	4x 3.4-3.8 / 4.9-5.0	3x 3.4-3.8 / 4.9-5.0	2x 3.4-3.8 / 4.9-5.0
Operational bands	4x 3.6/5.0GHz	3x 3.6/5.0GHz	2x 3.6/5.0GHz
Radiation pattern	Directional		
Nominal polarisation	2x Horizontal 2x Vertical	1x Horizontal 2x Vertical	1x Horizontal 1x Vertical
Peak gain	3.4-3.8 GHz	9dBi	
(excl cable loss)+	5-6 GHz	9dBi	
	3.6 GHz H Plane	60	
Typical 3dB	5.4 GHz H Plane	65	
beamwidth ° +	3.6 GHz E Plane	55	
	5.4GHz E Plane	50	
Efficiency - excluding cable loss (all bands)		> 60%	
Correlation co-efficient (all bands)		< 0.2	
Max input power (W)		20 Watts	
Nominal impedance		50Ω	

Mechanical Data

Dimensions (mm)	Height	168 (6.6")		
	Width	188 (7.4")		
	Depth	193 (7.6")		
Operating temp (°C)	-40° / +80°C (-40° / 176°F)			
Material	Lexan EXL 9330			
Colour	White			
Ingress Protection	IP66			
Vandal Resistance	IK10			
Weight (g)	1250	1185	1120	

Mounting Data

Fixing	Rail mount / mast mount
Mounting bracket material	Stainless steel / Aluminium
Pole diameter (mm)	20-50 / (0.78 - 1.96")


Connector Data

Type	N female x 4	N female x 3	N female x2
------	--------------	--------------	-------------

+Peak gain and beamwidth data for each element measured individually based on a vertically polarised element

Electrical Data

Typical VSWR*

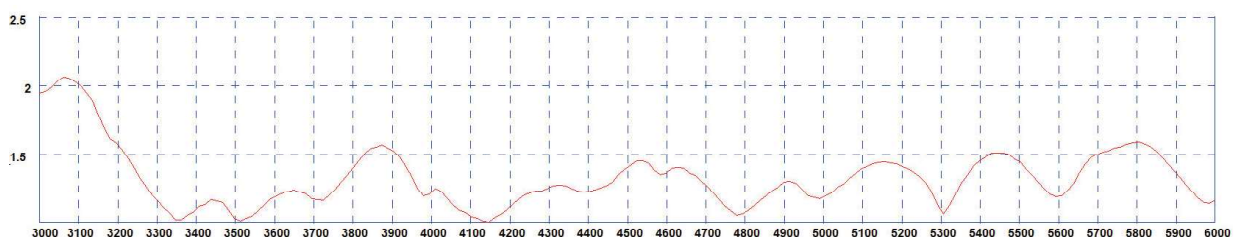

*VSWR of typical element measured in free space without cable

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

PANORAMA ANTENNAS

WMM[X]9G-36-55-NJ 27/07/2020 - V2

Page 2

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.


MiMo Directional 3.6/5.0GHz Antenna

WMM[X]9G-36-55-NJ

PANORAMA ANTENNAS


Electrical Data

Typical Isolation **

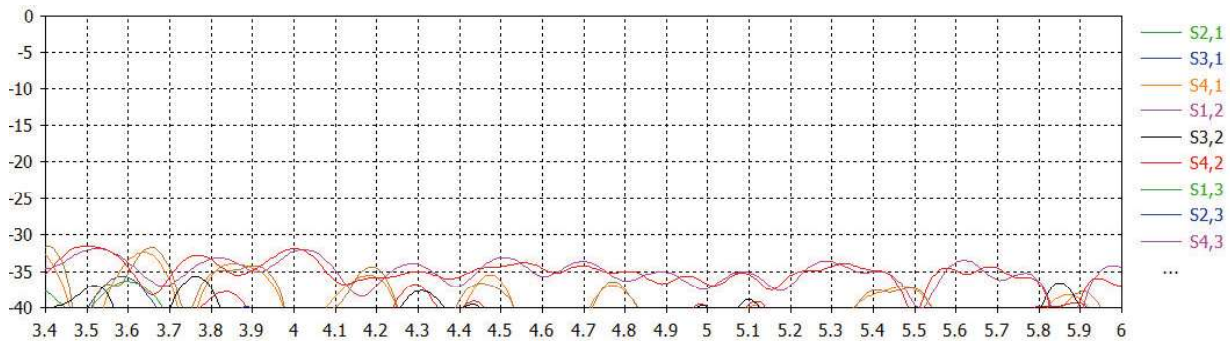


**Isolation measured in free space without cable.

Typical Swept Peak Gain ***

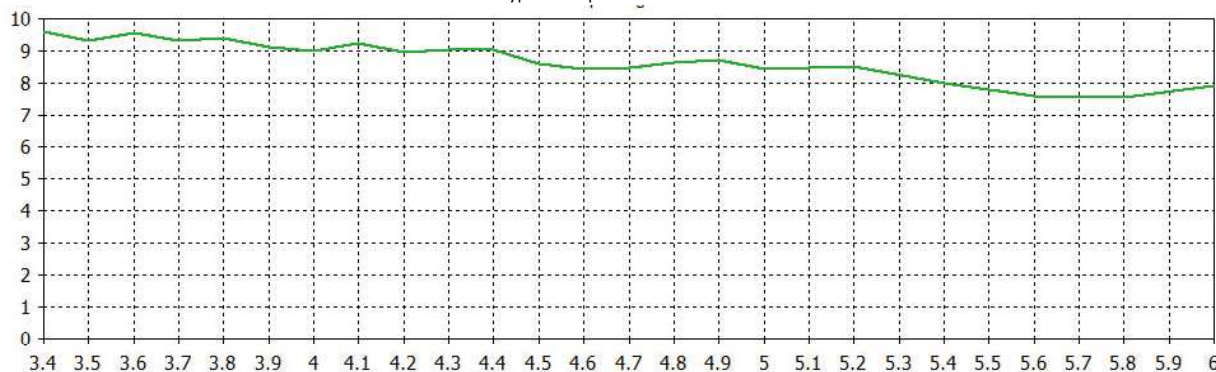

*** Swept peak gain simulated in CST Microwave studio for each element excluding cable loss

Typical Efficiency ****

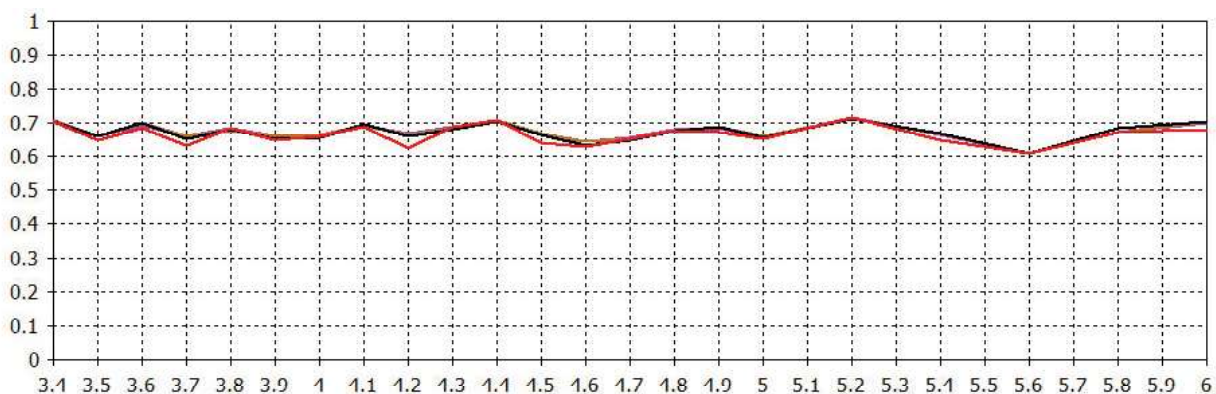

**** Efficiency simulated in CST Microwave studio for each element excluding cable loss

MiMo Directional 3.6/5.0GHz Antenna


WMM[X]9G-36-55-NJ

PANORAMA  ANTENNAS


* Patterns simulated in CST Microwave studio based on 4x Elements fed together

Pattern Data 4x
Elements


Typical 3D Pattern 3.6GHz*

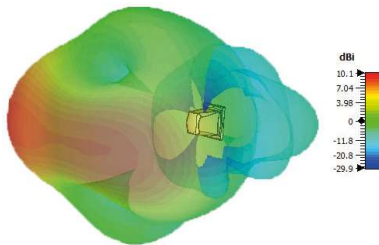


Typical E Plane Pattern 3.6GHz*

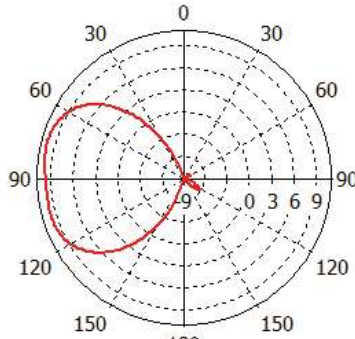


Typical H Plane Pattern 3.6GHz*

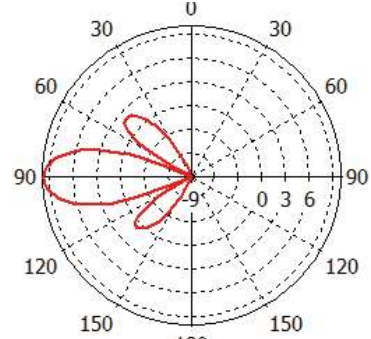


Typical 3D Pattern 5.4GHz*

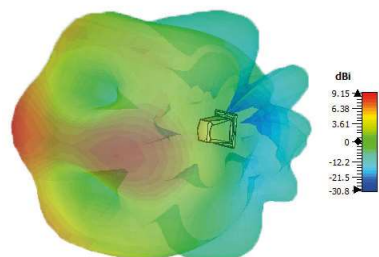

Typical E Plane Pattern 5.4GHz**

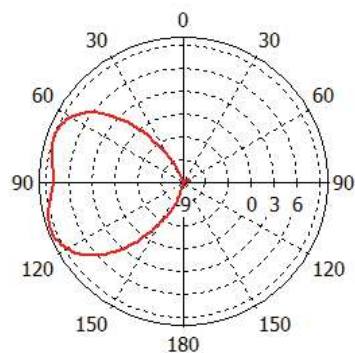


Typical H Plane Pattern 5.4GHz**

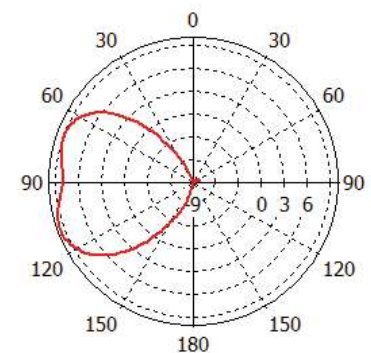


** Patterns simulated in CST Microwave studio based on one vertical element fed

Pattern Data Each
Element


Typical 3D Pattern 3.6GHz**

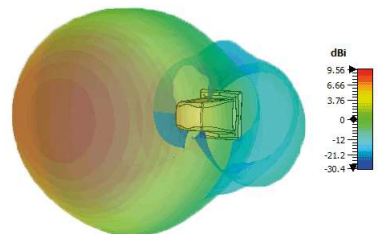


Typical E Plane Pattern 3.6GHz**

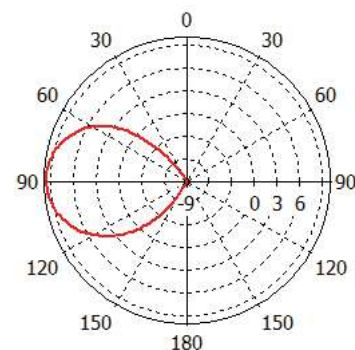


Typical H Plane Pattern 3.6GHz**

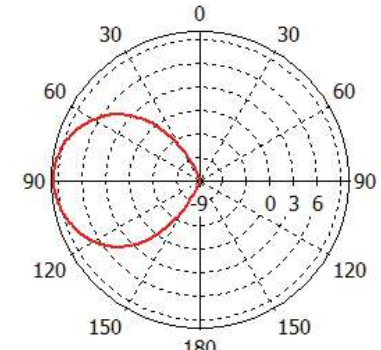


Typical 3D Pattern 5.4GHz**

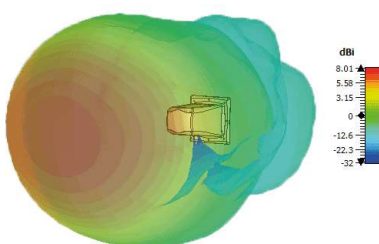

Typical E Plane Pattern 5.4GHz**

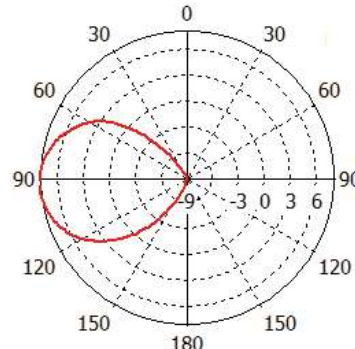

Typical H Plane Pattern 5.4GHz**

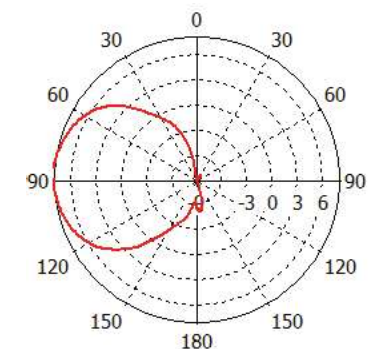

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

PANORAMA  ANTENNAS

WMM[X]9G-36-55-NJ 27/07/2020 - V2

Page 4

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.