

Directional 4x4MiMo 4G/5G Antenna

WMM4G-6-60

PANORAMA ANTENNAS



4x4 MiMo directional antenna for 4G/5G
4x CAT18 617-960/1710-6000MHz elements
Suitable for wall or mast mounting


The WMM4G-6-60 is a high directional gain 4x4 MiMo signal boosting antenna for 4G and 5G networks. Incorporating four separately fed wideband element assemblies in a single housing the WMM4G-6-60 is equipped to provide client side MiMo support for 4G and 5G networks offering 6dBi of peak gain at 617-960MHz and 9dBi peak gain at 1710-6000MHz.

The weather resistant housing is designed for wall mounting and wall and mast mount brackets are provided. Supplied with fitted low loss double shielded cable for cellular/LTE the WMM4G-6-60 minimises exposed connector joints and simplifies cable management for easy installation.


The WMM4G-6-60 is a cost effective value added product for network operators and service providers ensuring a stable link with improved data rates for subscribers thereby improving satisfaction and retention.

Technical Drawing

WMM4G-6-60-5SP Shown

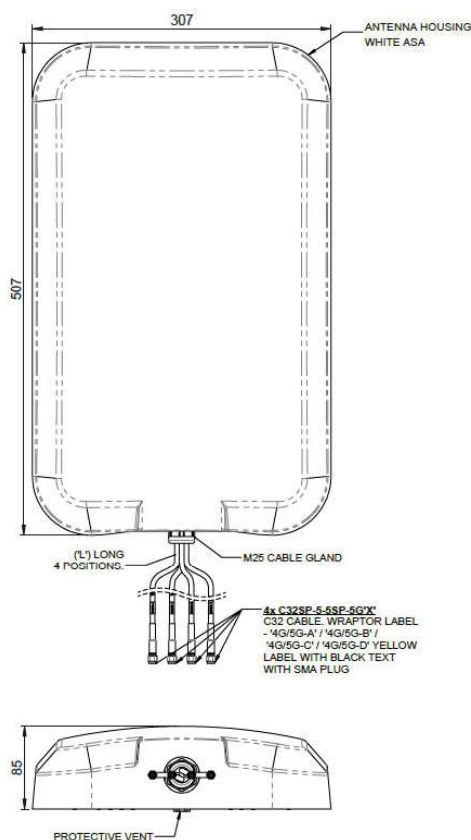

OPERATING FREQUENCIES:
4G/5G-A: 617-960/1710-6000 MHz
4G/5G-B: 617-960/1710-6000 MHz
4G/5G-C: 617-960/1710-6000 MHz
4G/5G-D: 617-960/1710-6000 MHz



Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

04/06/2020 V2.1

Page 1

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

Directional 4x4MiMo 4G/5G Antenna

WMM4G-6-60

PANORAMA  ANTENNAS

Product Data

Part No.

WMM4G-6-60-5SP

Electrical Data

Frequency range (MHz)	4x 4x 617-960/1710-6000
Operational bands	4x 4G/5G
Radiation pattern	Directional
Nominal polarisation	+/- 45deg / Vertical
Peak gain	617-960MHz 6dBi
(excl cable loss)+ 1710-6000MHz	9dBi
Efficiency - excluding cable loss (all bands)	> 60%
Correlation co-efficient (all bands)	< 0.2
Max input power (W)	20 Watts
Nominal impedance	50Ω

Mechanical Data

Dimensions (mm)	Height	507 (19.96")
	Width	307 (12.01")
	Depth	85 (3.34")
Operating temp (°C)	-40° / +80°C (-40° / 176°F)	
Material	ASA	
Colour	White	
IP Rating	IP66	
Radome material certifications	UL94-HB, UL746C-f2	
Weight (g)	5100	
Survival wind speed (m/s)	55	

Mounting Data

Fixing	wall mount / flush wall mount /mast mount
Mounting bracket material	Coated steel / Aluminium / Stainless Steel
Pole diameter (mm)	20-50 / (0.78 - 1.96")

Cable & Connector Data

Cable Type	CS32 FRZH (Meets EN6722 / EN45545-2)
Diameter (mm)	5 (0.2")
Length (m)	5 (16.4')
Connector	SMA(m) x 4

+ Peak gain derived from CST Microwave Studio and excludes cable loss.

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

22/05/2020 V2.1

Page 2

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

www.lucom.de


Directional 4x4MiMo 4G/5G Antenna

WMM4G-6-60

PANORAMA ANTENNAS


Electrical Data

Typical VSWR*

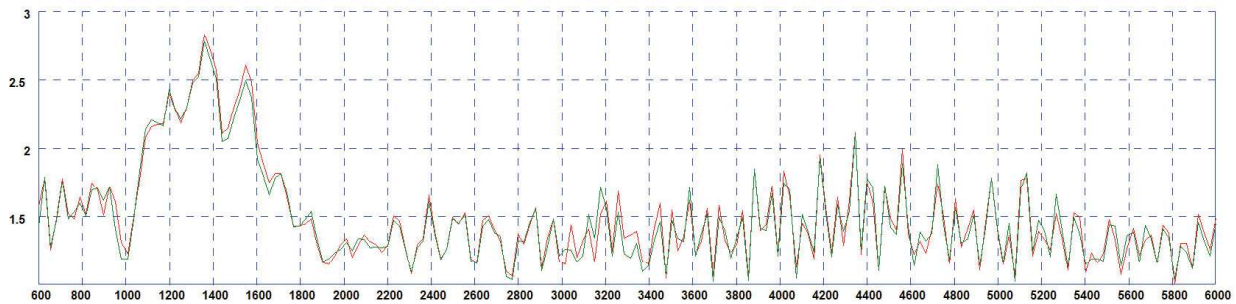


*VSWR for elements assemblies 1 and 2 measured with 5m (16') of CS32 cable.

Typical Efficiency 617-2700MHz*

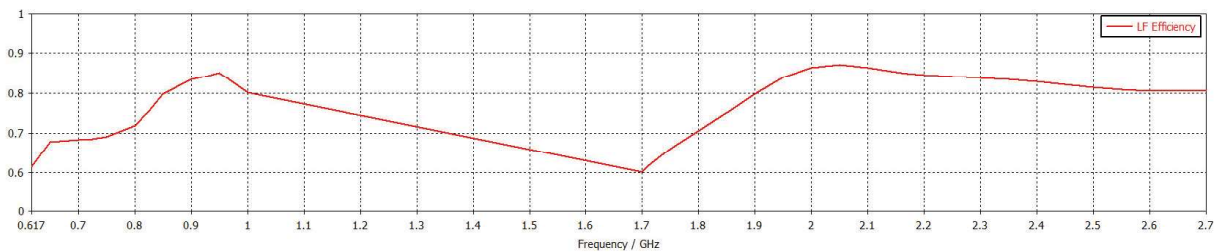


*Efficiency simulated in CST Microwave Studio excluding cable loss.

Typical Efficiency 3400-6000MHz*

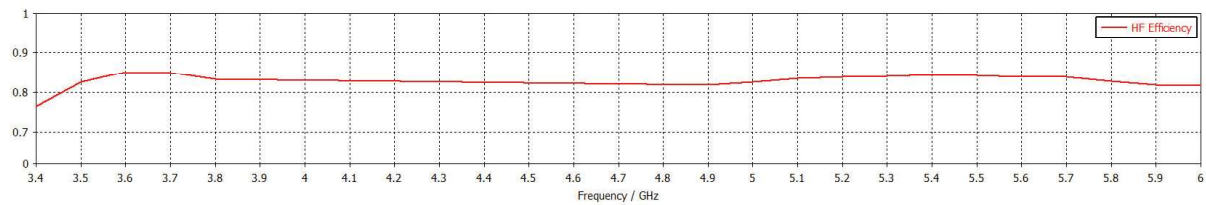


*Efficiency simulated in CST Microwave Studio excluding cable loss.

Typical Swept Gain 617-2700MHz*

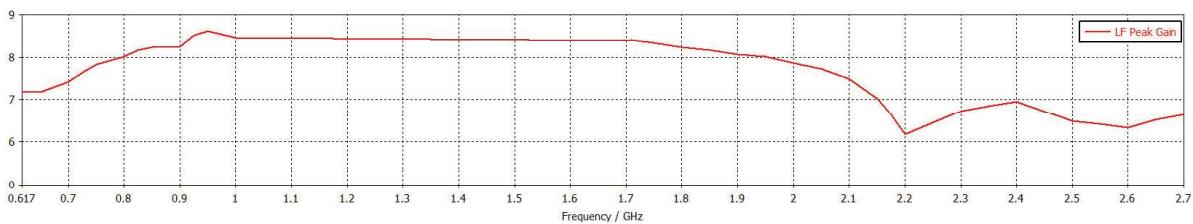

*Swept gain simulated in CST Microwave Studio excluding cable loss.

Typical Swept Gain 3400-6000MHz*

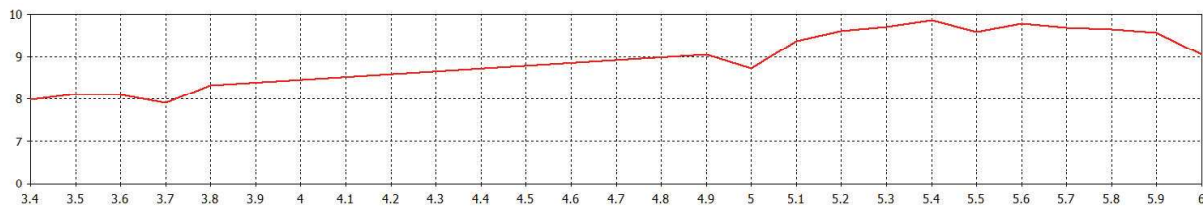

*Swept gain simulated in CST Microwave Studio excluding cable loss.


Directional 4x4MiMo 4G/5G Antenna

WMM4G-6-60


PANORAMA ANTENNAS

3D Patterns


Typical 3D Pattern 617MHz*

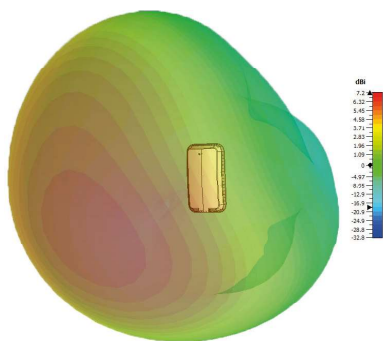


Typical 3D Pattern 700MHz*

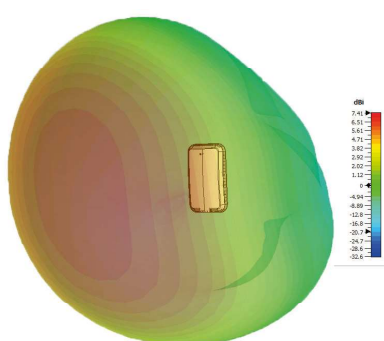


Typical 3D Pattern 800MHz*

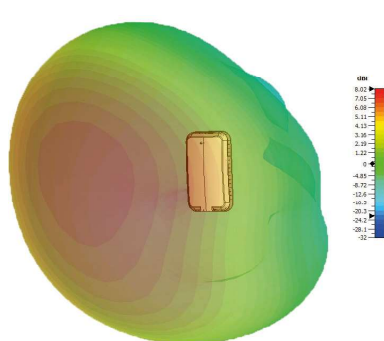


Typical 3D Pattern 900MHz*

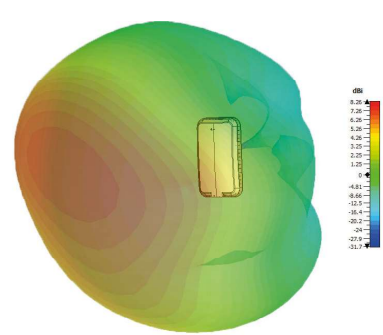


Typical 3D Pattern 1800MHz*

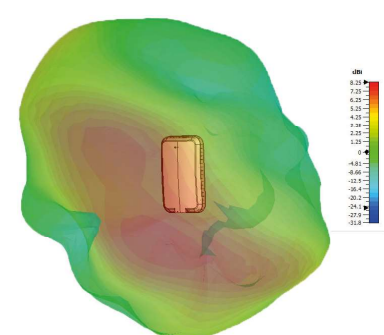


Typical 3D Pattern 2100MHz*

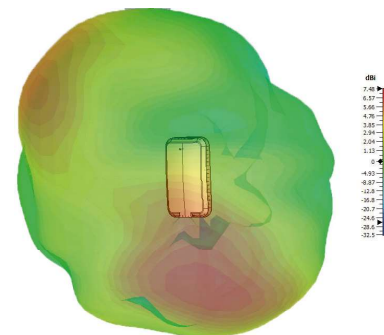


Typical 3D Pattern 2600MHz*

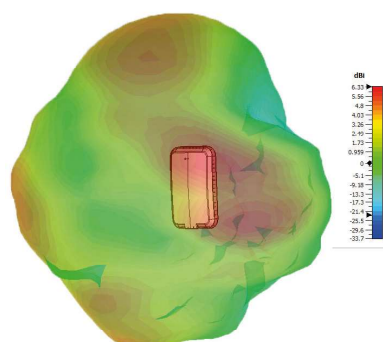

Typical 3D Pattern 3600MHz*

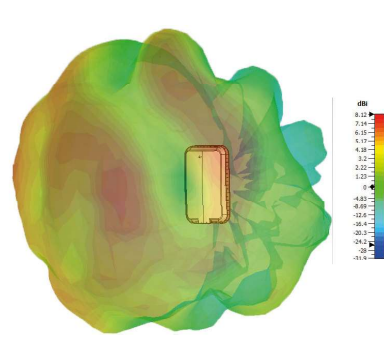

Typical 3D Pattern 5600MHz*

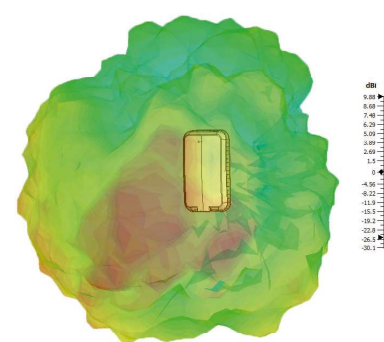

www.lucom.de